



Canon

Palmtronic

LE-84

INSTRUCTIONS

Canon

CANON INC.

11-28, Mita 3-chome, Minato-ku, Tokyo 108, Japan

CANON U.S.A., INC. HEAD OFFICE

10 Nevada Drive, Lake Success, Long Island, N.Y. 11040, U.S.A.

CANON U.S.A., INC. CHICAGO OFFICE

457 Fullerton Avenue, Elmhurst, Illinois 60126, U.S.A.

CANON U.S.A., INC. LOS ANGELES OFFICE

123 Paularino Avenue East, Costa Mesa, California 92626, U.S.A.

CANON OPTICS & BUSINESS MACHINES CANADA, LTD.

HEAD OFFICE

3245 American Drive, Mississauga, Ontario, L4V 1B8, Canada

CANON AMSTERDAM N.V.

Gebouw 70, Schiphol Oost, Holland

CANON LATIN AMERICA, INC. SALES DEPARTMENT


P. O. Box 7022, Panama 5, Rep. of Panama

CANON LATIN AMERICA, INC. REPAIR SERVICE CENTER

P. O. Box 2019, Colon Free Zone, Rep. of Panama

CANON INC. HONG KONG BRANCH

5th Floor 2-6, Fui Yiu Kok Street, Tsuen Wan, New Territories, Hong Kong

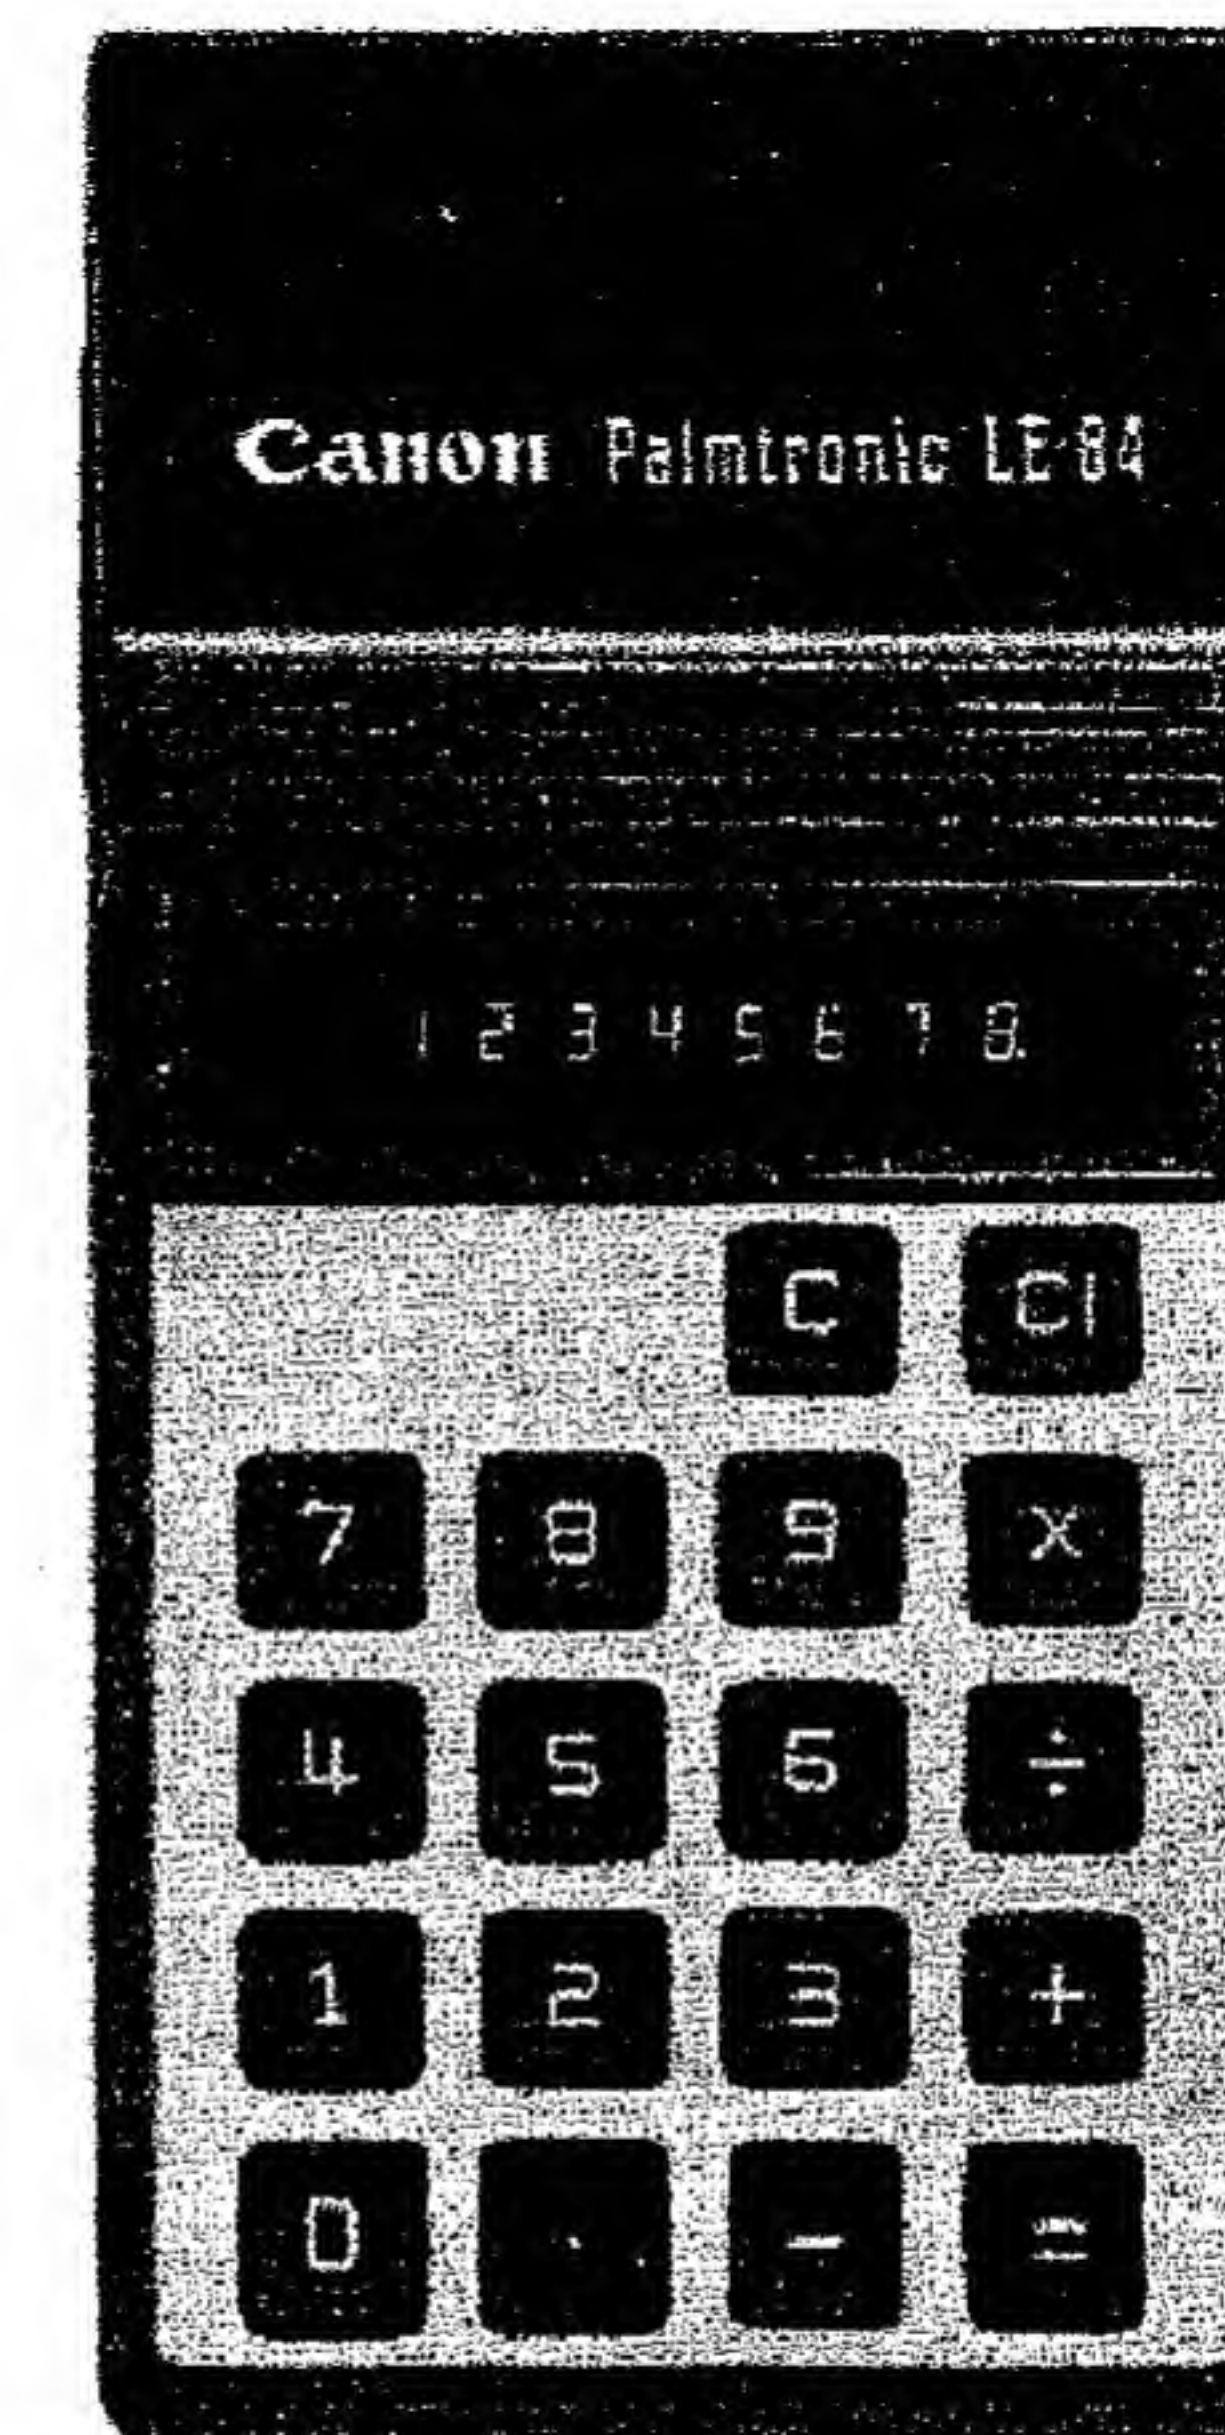

English Edition

Operational Keys

C Clear Key: Used for clearing all entries and calculations.

CI Clear Indicator key: Used for correcting entries.

x **÷** **+** **-** **=** Function keys: Depress them according to the calculation expression.

0 **1** ~ **9** Numeral keys: Used for entering numerals.

. Decimal Point key: Depress it at the position of the decimal point of the numerals to be entered. In the case of fractional numerals only, it is not necessary to depress the **.** key before the decimal point.

How to Operate

1. Set the power switch at ON and depress the **C** key.
2. The keys are operated according to the calculation expression.
3. Depress the **CI** key when incorrect entries are made. You may then make new entries, and continue the operation.
4. It is not necessary to depress the **C** key every time before starting the calculations, because the preceding calculation result is automatically cleared. But calculations containing minus signs are possible only in the following cases: In operation depress the **C** key before starting calcu-

lations.

$$-a \times b = \text{operation } \text{C} \text{ } - \text{ } a \text{ } \times \text{ } b \text{ } =$$

$$-a \pm b = \text{operation } \text{C} \text{ } - \text{ } a \text{ } \pm \text{ } b \text{ } =$$

5. Please keep in mind that accurate results depend on correct key operation.

Calculation Examples

Example	Key Operation
Addition and Subtraction 1) $8 + 3 + 5.5 = 16.5$ 2) $4 - 7 - 3 = -6$	$8 \text{ } + \text{ } 3 \text{ } + \text{ } 5.5 \text{ } = \text{ (16.5)}$ $4 \text{ } - \text{ } 7 \text{ } - \text{ } 3 \text{ } = \text{ (-6.)}$
Multiplication and Division 1) $3.6 \times 1.7 = 6.12$ 2) $369 \div 12.3 = 30$	$3.6 \text{ } \times \text{ } 1.7 \text{ } = \text{ (6.12)}$ $369 \text{ } \div \text{ } 12.3 \text{ } = \text{ (30.)}$

1. Minus sign is displayed in front of the displayed numeral (up to 7 digits) when it becomes a negative number (floating minus sign). With 8 digit negative number, however, the minus lamp at the right of the indicator panel lights up.
2. When the integers of the calculation results exceed 8 digits, the numerals in the indicator panel flash on and off, and further operation is locked and only the 8 leftmost significant digits are displayed. In this case, the decimal point is dis-

played on the indicator, showing by its position (counting from the leftmost digits) how many digits have been dropped.

Depress the **C** key to release the keyboard interlock, and start the further operation.

Example	Key Operation
Repetitive addition and Subtraction 1) $2 + 3 + 3 = 8$ 2) $5 - 2 - 2 - 2 = -1$	$2 \text{ + } 3 \text{ = } (8.)$ $5 \text{ - } 2 \text{ = } (-1.)$
Constant addition and subtraction 1) $2 + 3 = 5$ $4 + 3 = 7$ $5 + 3 = 8$ 2) $1 - 2 = -1$ $2 - 2 = 0$ $3 - 2 = 1$	$2 \text{ + } 3 \text{ = } (5.)$ $4 \text{ = } (7.)$ $5 \text{ = } (8.)$ $1 \text{ - } 2 \text{ = } (-1.)$ $2 \text{ = } (0.)$ $3 \text{ = } (1.)$
Constant multiplication and division 1) $2 \times 4 = 8$ $3 \times 4 = 12$ $4 \times 4 = 16$ 2) $6 \div 3 = 2$ $9 \div 3 = 3$ $12 \div 3 = 4$	$2 \text{ x } 4 \text{ = } (8.)$ $3 \text{ = } (12.)$ $4 \text{ = } (16.)$ $6 \text{ } \div \text{ } 3 \text{ = } (2.)$ $9 \text{ = } (3.)$ $12 \text{ = } (4.)$

1. Repetitive addition or subtraction of a number can be accomplished, after the

number has been entered, by simply depressing the **=** key.

2. The first operation in constant calculation is performed according to the calculation expression.
3. In constant calculations, the last entered numeral of the first calculation before depression of the **=** key becomes the constant.
4. From the second operation, each calculation result is obtained by just entering the numeral and depressing the **=** key.

Example	Key Operation
Raising to Powers 1) $3^2 = 9$ 2) $3^4 = 81$	$3 \text{ x } = (9.)$ $3 \text{ x } = = = (81.)$


1. Raising to n -th power can be obtained automatically by depressing the **=** key $(n-1)$ times.

Example	Key Operation
Mixed Calculations 1) $9 \div 5 \times 3.2 + 7 = 12.76$ 2) $(2 + 4) \div 3 \times 8.1 = 16.2$	$9 \text{ } \div \text{ } 5 \text{ x } 3.2 \text{ + } 7 \text{ = } (12.76)$ $2 \text{ + } 4 \text{ } \div \text{ } 3 \text{ x } 8.1 \text{ = } (16.2)$

Dry Battery

Slide off the battery cover located on the head of the Palmtronic, and load the battery chamber of the Palmtronic with four new penlight dry batteries (size AA). When load-

ing the batteries, lay the black tape, and put the batteries from the (—) side according to the diagram inside. The Palmtronic will not operate if the batteries are placed upside down.

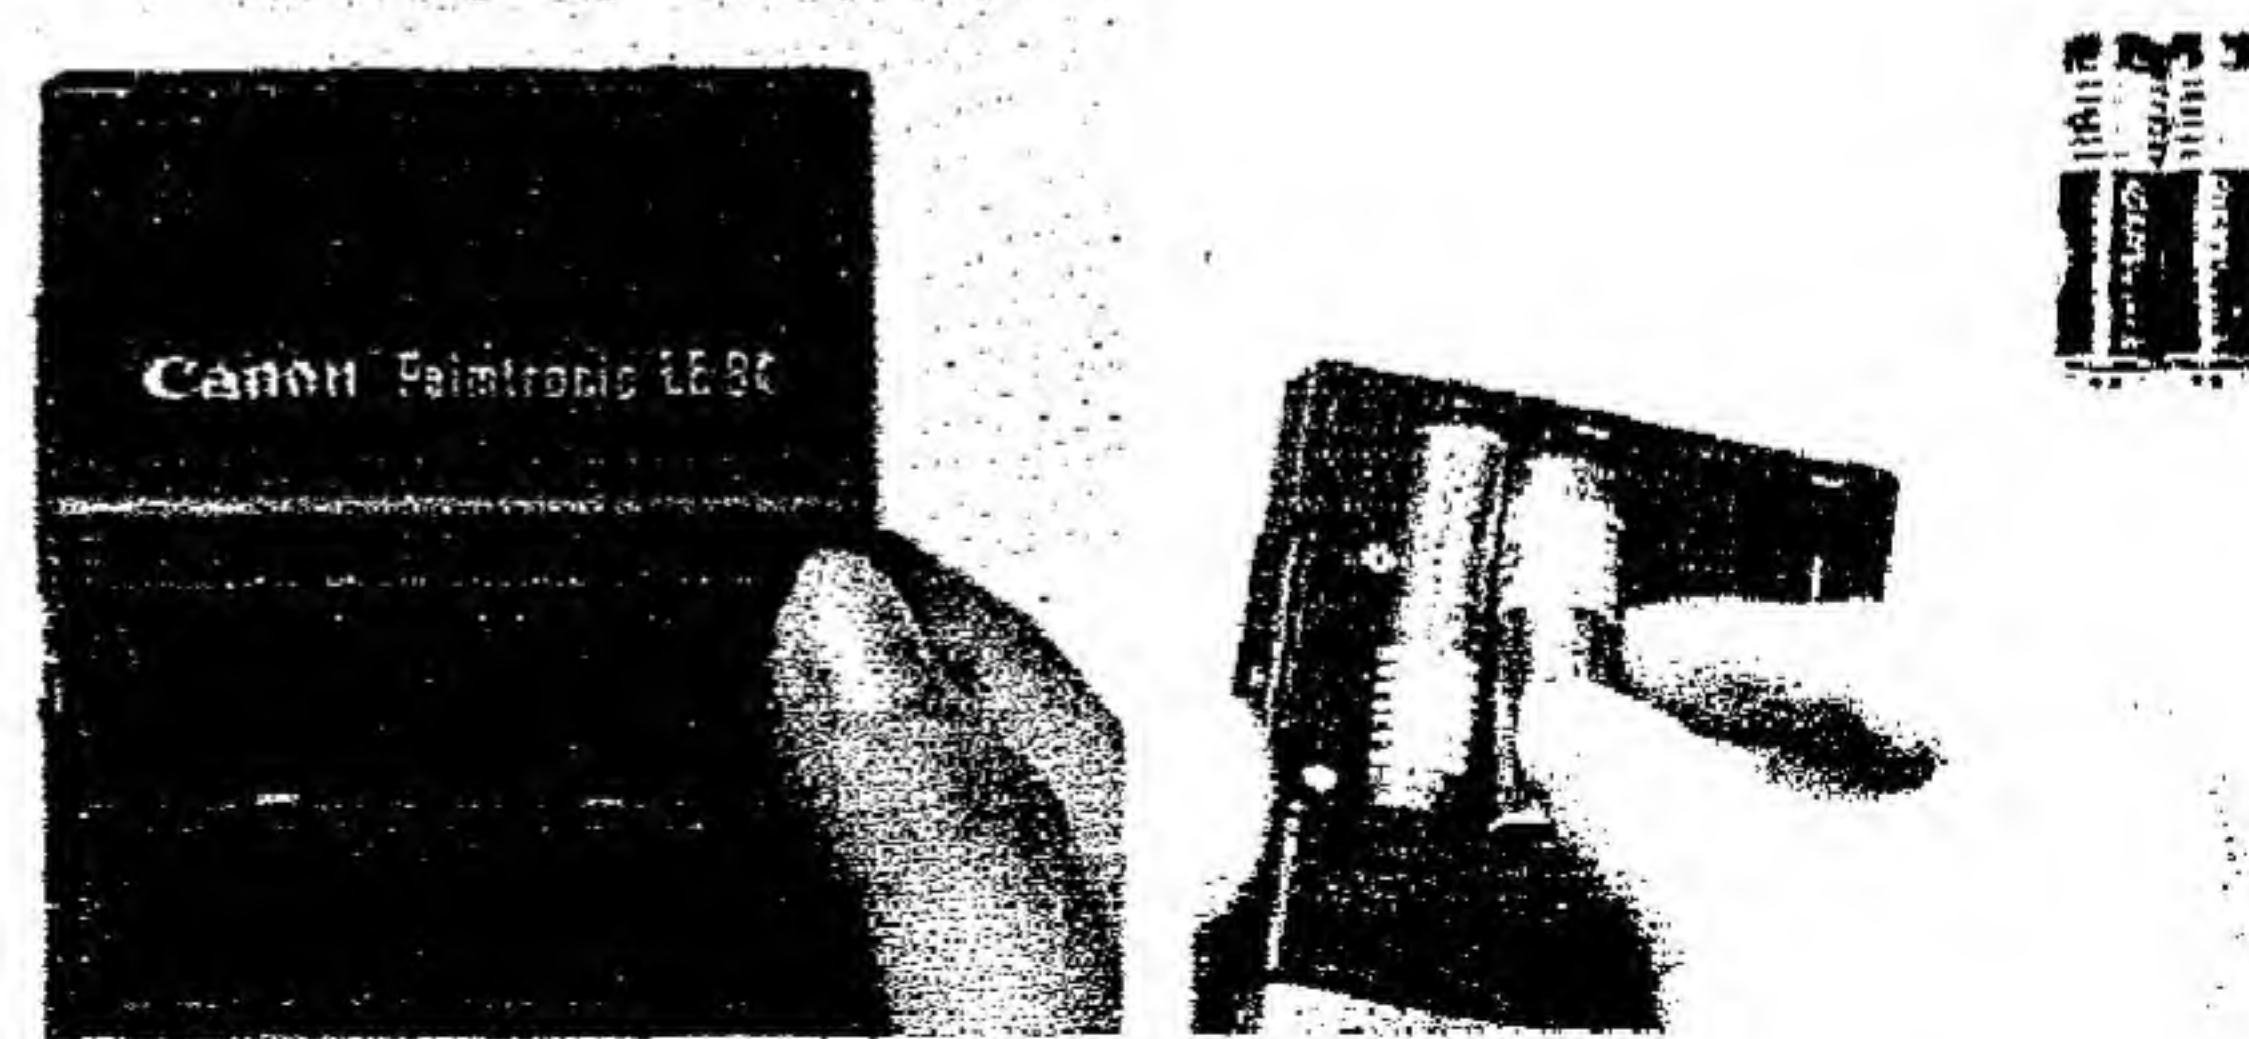

If the LED display becomes dim, it means there is not sufficient voltage, in this case you should replace the dry batteries.

When replacing the dry batteries, change all of the four batteries at the same time. The dry batteries can be easily taken out by pulling the black tape.

AC Adaptor (option)

The Canon AC Adaptor AD-1 was designed to allow the Palmtronic to be plugged in and operated by normal AC current.

How to use

1. Insert the output cord of the AC Adaptor AD-1 to the socket of the Palmtronic.
2. Plug in AC Adaptor AD-1 to the AC outlet.
3. Turn on the power switch of the Palmtronic for immediate operation.

* The Canon AC Adaptor AD-1 should be used only with the Palmtronic.

** Do not leave the AC Adaptor AD-1 connected to outlet when not actually in use.

Specifications:

Type: "Palmtronic" (miniaturized) electronic calculator.

Keyboard: 10-key system.

Display: 8-digit LED (Light Emitting Diodes) display.

Registers: 3 calculating registers.

Calculation capacity (digits): 8 digits.

Decimal point system: Leftmost digit priority with all-floating decimal point system.

Negative numbers: True value with floating minus sign or minus lamp.

Types of calculation: Addition, subtraction, multiplication and division. Repetitive addition and subtraction. Constant addition, subtraction, multiplication and division. Chain multiplication and division. Raising to powers. Various mixed calculations.

Indication functions: Zero suppressed indication panel. Floating minus sign & minus lamp.

Automatic calculation functions: Constant calculation. Raising to powers.

Safety functions: Keyboard lock with overflow warning when results overflow.

Elements: MOS LSI

Power source: 4 penlight dry batteries (size AA). D.C. 6V 0.4W. Alkaline batteries make possible about 50 hours of continuous use. Manganese batteries make possible about 30 hours of continuous use.

AC with the AC Adaptor AD-1.

Usable temperature: 0°C to + 40°C (32°F to 104°F)

Size: 73mm wide x 153mm long x 24mm high (2-7/8" x 6-1/16" x 15/16")

Weight: 210 g (7.4 oz.) including dry batteries.

Subject to alterations.